



SOSEN LED Driver, Your Smart Choice

Specifications



SS-200CA Series LED Driver

Model: SS-200CA-XX*

Description: 200W LED Driver

Rev.: V00

Release Date: 2019-09-17

SS-200CA Series LED Driver

SOSEN
LED DRIVER



LED DRIVER

CA Series



Features:

- Efficiency up to 92%
- Dimming: DALI, 0-10V, PWM, Resistor, Timing
- Dim to Off
- Surge protection: L/N-PE: 4kV, L-N: 4kV
- Optional aux : 12V/0.2A
- Standby(STB) function(Optional)
- Standby power<0.5W
- IP65
- TYPE HL, suitable for hazard locations
- Protections: SCP/OTP/UVP/OVP
- Warranty: 5 years



IP65 Class P

Description:

SS-200CA series are constant current waterproof LED Driver in round shape with 90-305Vac and high efficiency, compatible with multiple dimming way and support dim to off, variety of auxiliary output is available, output voltage and current programmable setting, suitable for industrial and High-bay lights, plant lights and other lighting occasions.

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-200CA-56*	90-305Vac	201.6W	28-56V	36-56V	2.8-5.6A	7%	0.97	92%	90°C

SS-200CA Series LED Driver

“*” Means Additional Function

“*”	DALI (suffix:D)	AUX 12V (suffix:H)	NTC (suffix:N)	0-10V/PWM Dim /Timing (suffix:B)	Remark
BH		✓		✓	
DH	✓	✓			

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		277Vac	
AC Input Range	90Vac		305Vac	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			2.4A	100Vac, Full load
Max Input Power			240W	100Vac, Full load
Max Inrush Current(120Vac)			60A	Cold start
Max Inrush Current(220Vac)			100A	Cold start
Max Inrush Current(277Vac)			130A	Cold start
Standby Power			0.5W	220Vac/50Hz, Dim-off or STB Enable
Power Factor	0.95	0.97		220Vac/50Hz, Full load
	0.90			100-277Vac/50Hz, 70-100% load
THD		7%	10%	220Vac/50Hz, Full load
			20%	100-277Vac/50Hz, 70-100% load

SS-200CA Series LED Driver

Output Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Output Voltage Range	28V		56V	Power derated @28-36V
Rated Output Voltage	36V		56V	$P_o=V_o \cdot I_o=200W$, Full load
Rated Output Current	3.6A		5.6A	5.6A for 36V, 3.6A for 56V
Current Adjustable Range(AOC)	2.8A		5.6A	
No Load Voltage			60V	
Efficiency @120Vac	89.0%	90.0%		Output 43V/4.65A
Efficiency @220Vac	91.0%	92.0%		Output 43V/4.65A
Efficiency @277Vac	91.0%	92.0%		Output 43V/4.65A
Output Current Tolerance	-5%		+5%	
Output Current Ripple(PK-AV)		5%	10%	
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac
			0.5S	220Vac
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	Tc, Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection			10W	Driver will not be damaged, Hiccup mode

SS-200CA Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
Aux Power (Optional)	12V	11V	12V	13.5V	
	12V			200mA	Peak current 300mA, lasted 15 minutes at most
0-10V Dimming (Optional)	Dim Vmax	0V		12V	
	Dim Range	10%Iomax		100%Ioset	
	Rec.Dim Range	1V		10V	
PWM Dimming (Optional)	PWM High	9.8V		10.2V	
	PWM Low	0V		0.3V	
	Frequency	1KHz		2KHz	
	PWM Duty	10%		100%	
Resistor Dimming (Optional)	Resistance	10Kohm		100Kohm	
	Dim Range	10%Iomax		100%Ioset	
DALI Dimming (Optional)	DA1 DA2 High	9.5V	16V	22.5V	
	DA1 DA2 Low	-6.5V	0V	6.5V	
	DA1 DA2 Current	0mA		2mA	
Dim to Off (Optional)	Dim-off	0.5V	0.7V	0.9V	
	Dim Turn on	0.5V	0.75V	0.9V	
STB function enabled voltage (Optional)	Enabled voltage	0V		0.5V	Standby power < 0.5W
	Disabled voltage	3.5V		12V	STB Wire no connect for disabled STB function
Lifetime(Tc≤65°C)		100,000 hours			
Lifetime(Tc≤75°C)		50,000 hours			
MTBF		200,000 hours			220Vac, Full load, Ta=25°C (MIL-HDBK-217F)
IP Grade		IP65			
Tc		90°C			
Warranty		5 years			Tc : 75°C
Net Weight		1500g			
Dimension		Φ151mm*71.5mm			D x H

NOTE: All the parameters above are tested Ta 25°C, unless specified.

SS-200CA Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+85°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 EN62493:2015	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015	
Radiation Emission	EN55015:2013+A1:2015	
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN61000-4-5	Difference mode 4kV, Common mode 4kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	Difference mode 6kV, Common mode 6kV,Criterion B

SS-200CA Series LED Driver

Safety Test Items:


Safety test items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	TUV Insulation Requirements	CCC Insulation Requirements	
Input-Output	1600Vac	3000Vac	3750Vac	Reinforced insulation
Input-Case	1600Vac	1500Vac	1875Vac	Basic insulation
Input-Dim	1600Vac	3000Vac	3750Vac	Reinforced insulation
Output-Dim	1600Vac	1000Vac	1000Vac	Additional insulation
Output-Case	500Vac	1000Vac	1000Vac	Function insulation
Dim-Case	500Vac	250Vac	250Vac	
Insulation Resistance	≥10MΩ			Input-Output, Test voltage:500Vdc
Ground Resistance	≤0.1Ω			25A/1min
Leak Current	≤0.75mA			277Vac

NOTE:

1. SOSEN warrants the LED Driver itself meets with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short Line and Neutral, LED+ and LED-, Dim+ and Dim - when Hi-pot test.
3. The CCC withstand voltage test needs to disconnect the built-in lightning protection tube. According to the IEC 60598-1:14 standard section 10.2, the "built-in lightning protection tube" can be marked on the nameplate to disconnect the discharge tube on testing.

Performance Curves:


Input Inrush Current

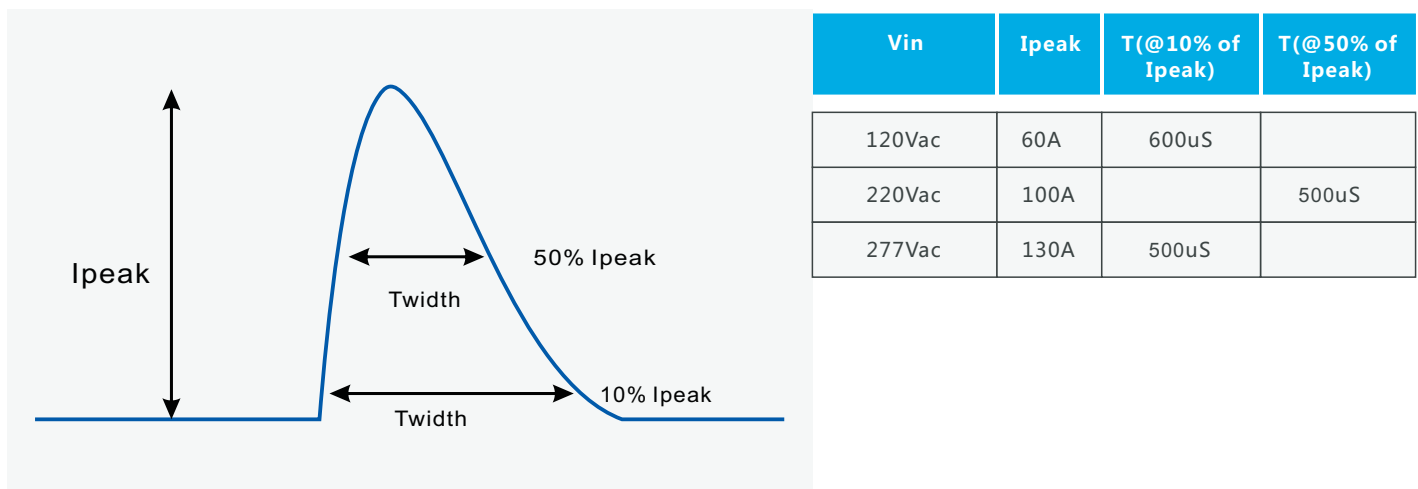

SS-200CA Series LED Driver


Performance Curves:

Output Voltage Vs. Output Current(Dim/AOC Window)

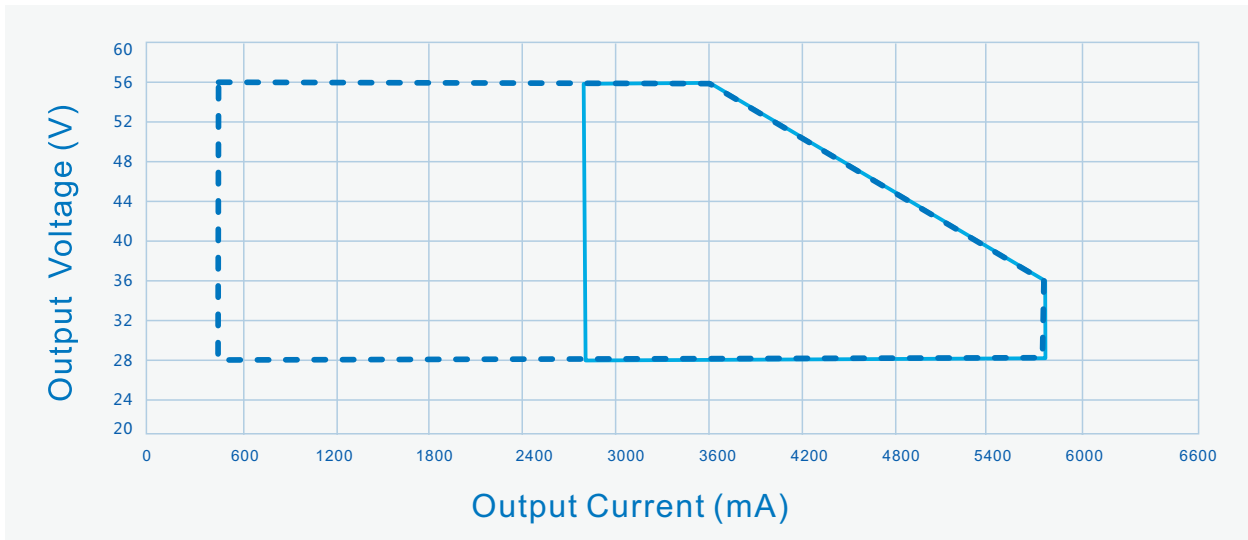

----- Dimming Window ————— AOC Window

Efficiency Vs. Output Voltage (Vin=120Vac)

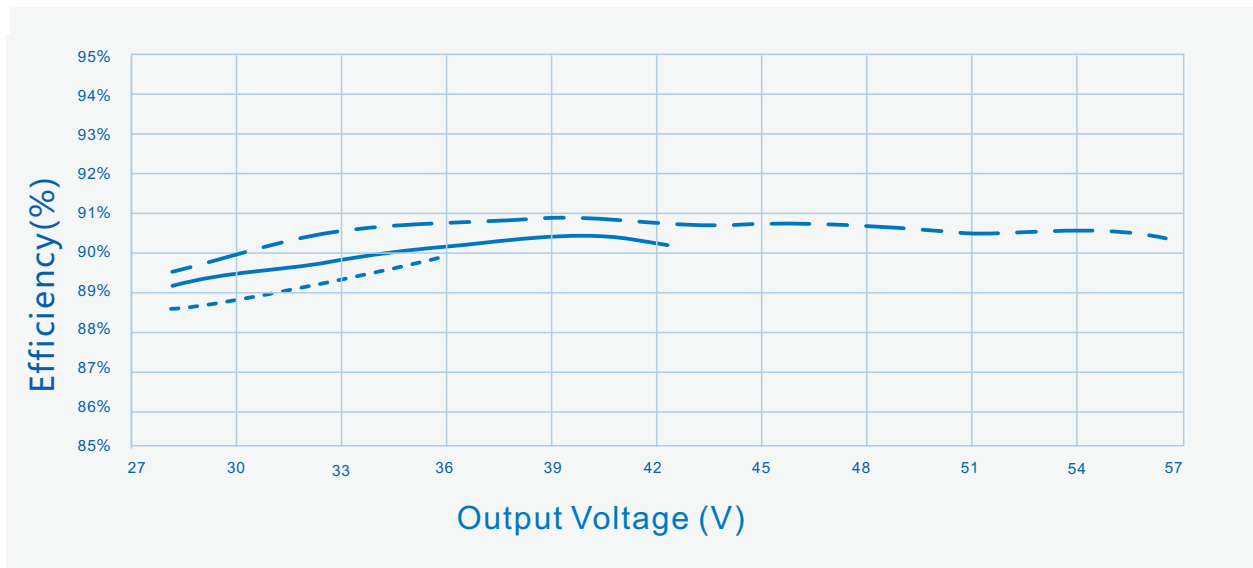


----- Io=5600mA ————— Io=4650mA - . - . Io=3600mA

SS-200CA Series LED Driver


Performance Curves:

Efficiency Vs. Output Voltage ($V_{in}=220V_{ac}$)

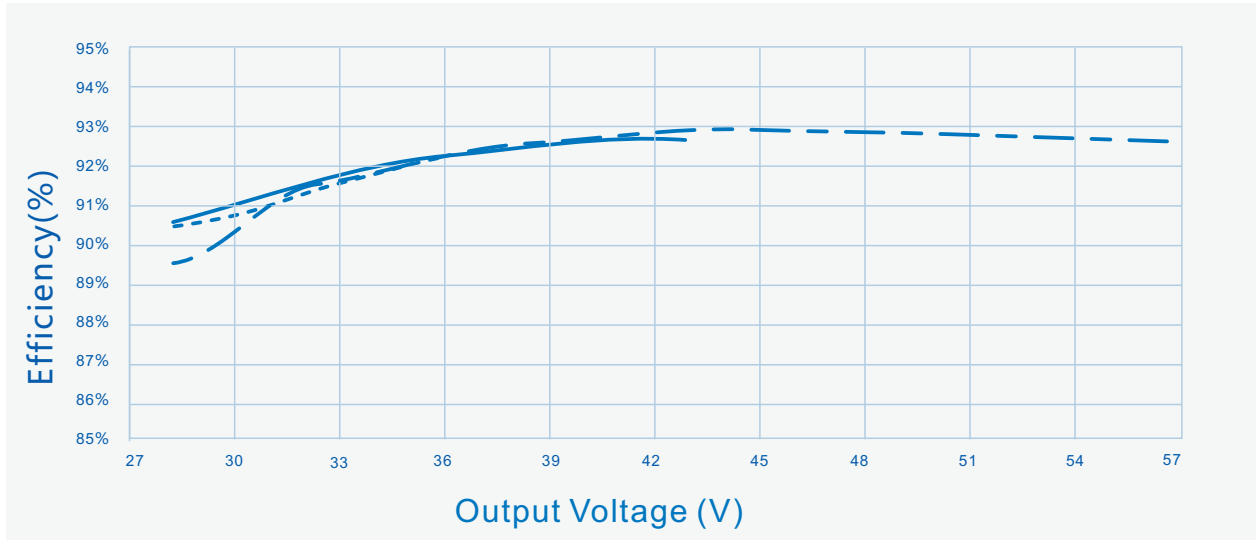

----- $I_o=5600mA$ _____ $I_o=4650mA$ - - - - $I_o=3600mA$

Efficiency Vs. Output Voltage ($V_{in}=277V_{ac}$)

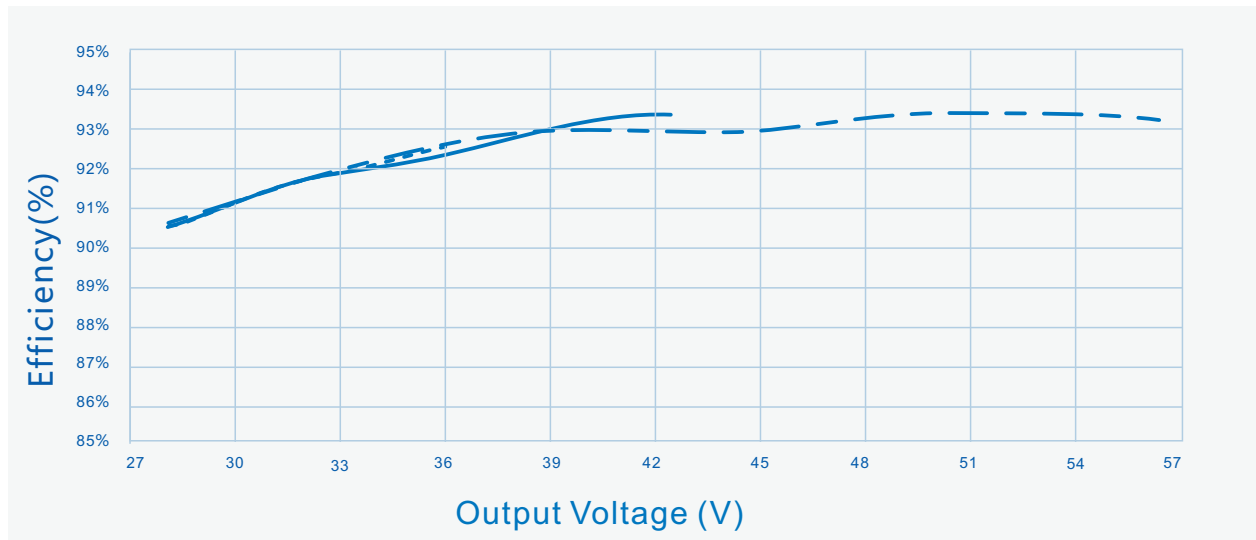


----- $I_o=5600mA$ _____ $I_o=4650mA$ - - - - $I_o=3600mA$

SS-200CA Series LED Driver


Performance Curves:

Power Factor Vs. Output Power

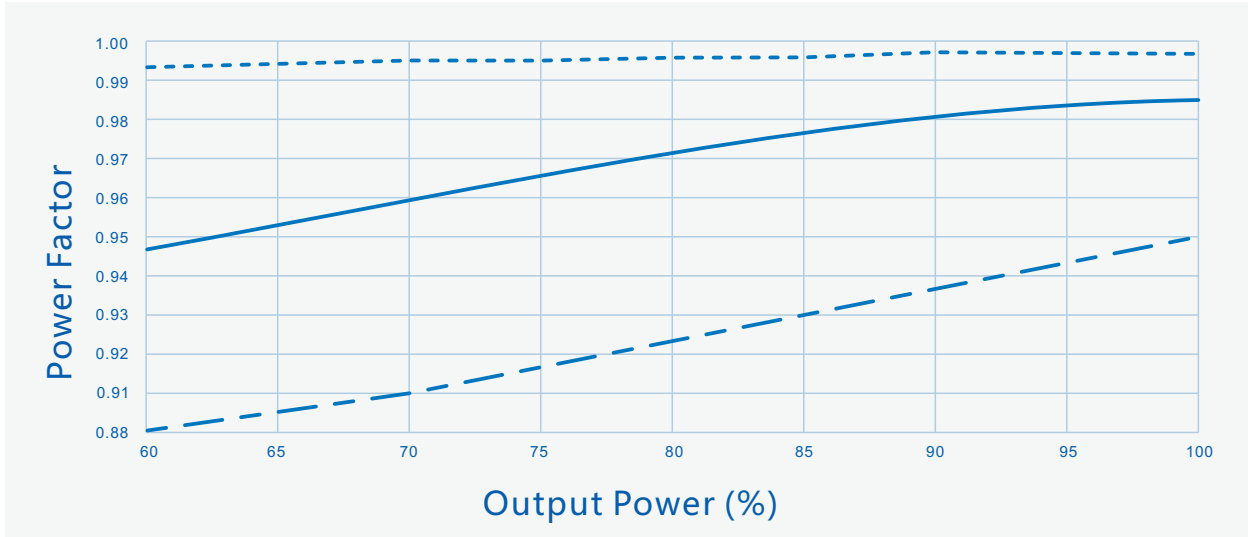

----- Vin=120Vac ——— Vin=220Vac - - - Vin=277Vac

THD Vs. Output Power

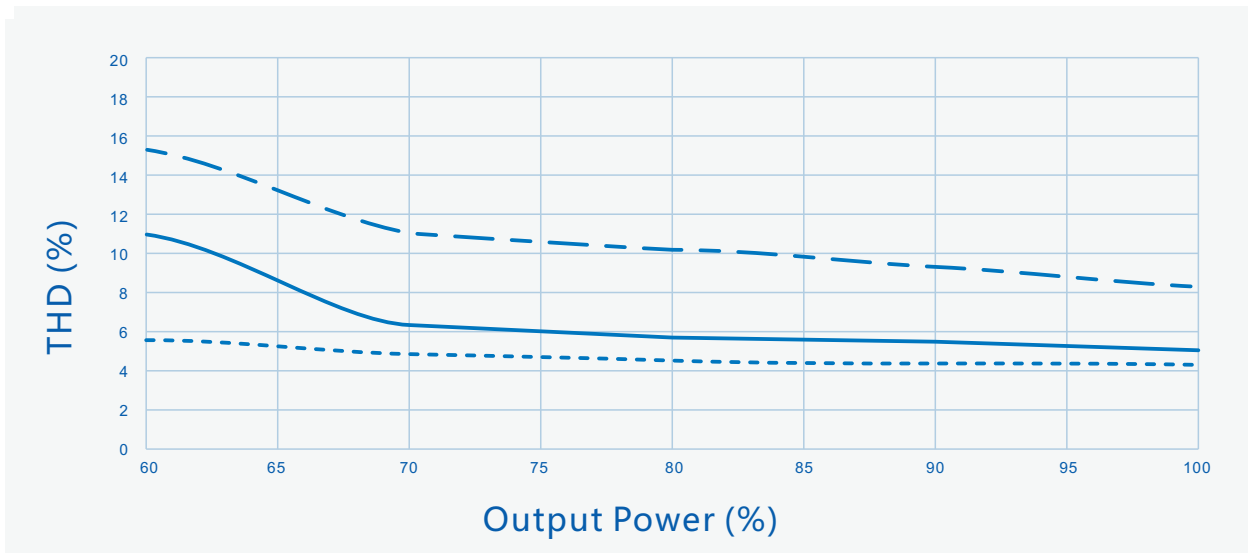


----- Vin=120Vac ——— Vin=220Vac - - - Vin=277Vac


SS-200CA Series LED Driver

Performance Curves:


Output power Vs. Input Voltage
(Ta Max.60°C)

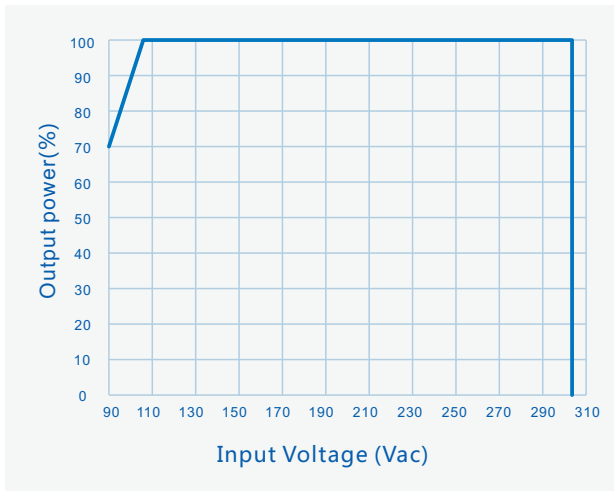


Output power Vs. Case Temperature

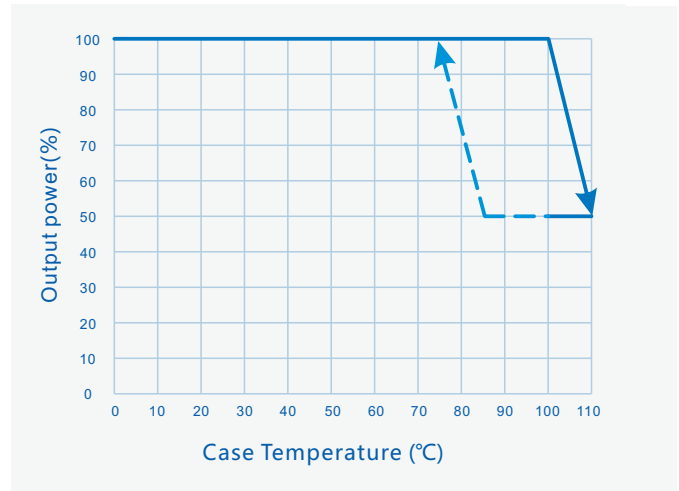

Output Power Vs. Dimming

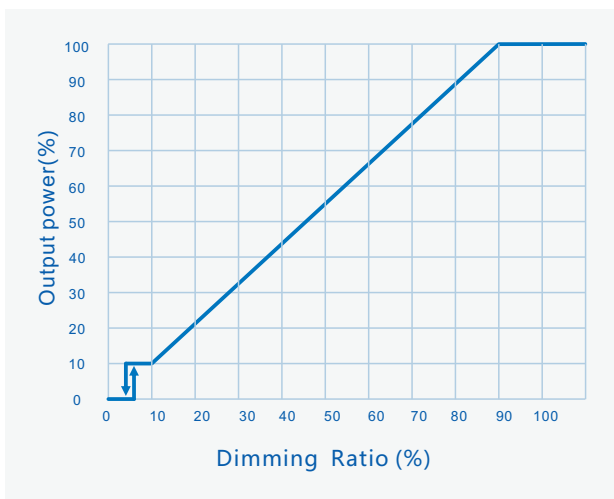


Lifetime Vs. Case Temperature

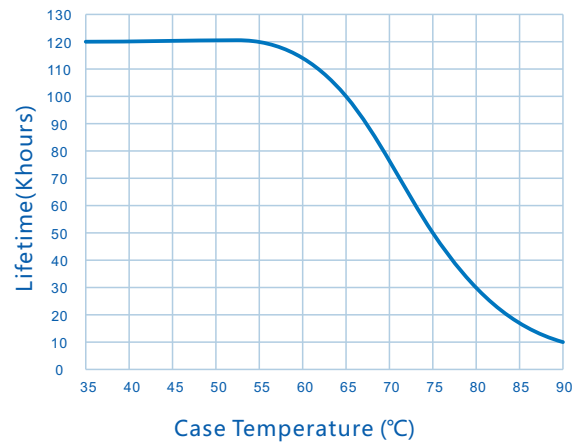

SS-200CA Series LED Driver

Performance Curves:

No load voltage VS. Output current

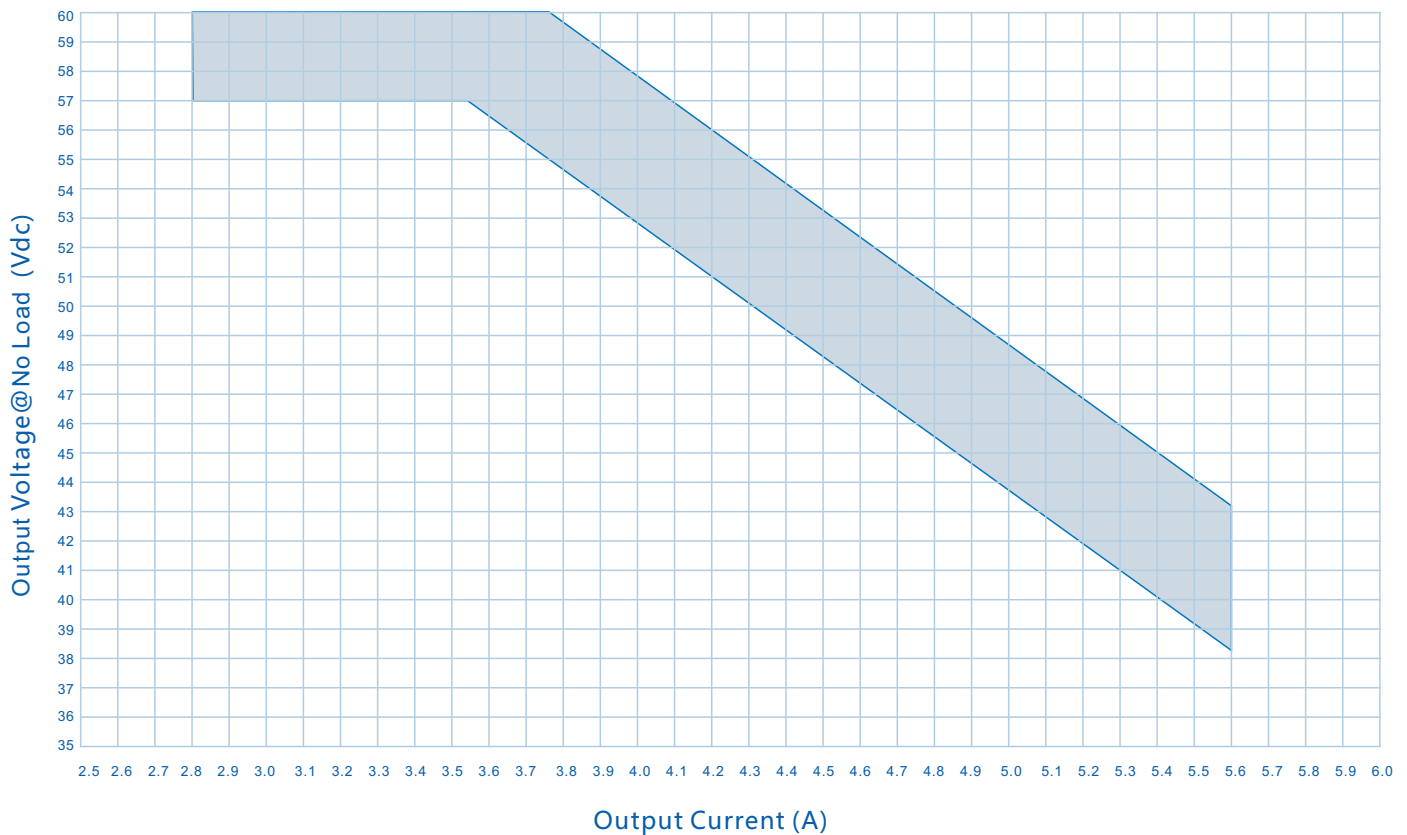

Warning:


Operation methods for adjusting output power:

Method 1: First adjusting the potentiometer to the minimum by rotating counterclockwise, then fine-tune the potentiometer to the specified power by rotating clockwise. If the specified power is exceeded during the adjustment process and the power is reduced from high value. Please adjusting the potentiometer to the minimum position and readjust it.

Method 2: First adjusting the potentiometer to the minimum position by rotating counterclockwise, then adjusting the potentiometer slowly by rotating clockwise and confirm whether driver's output current's corresponding no load voltage is in the shadow of upper drawings. If not, pls adjusting the potentiometer to the minimum position and readjust it.

SS-200CA Series LED Driver

Mechanical characteristics(Unit: mm)

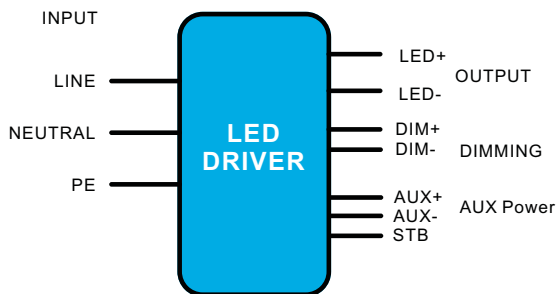

AC Input Cable(Lead Length outside enclosure 350±10mm):

UL model: SJTW,3*0.824mm²,O.D: 7.8mm,Black:L,White:N,Green:PE
 Euro model: H05RN-F,3*1.0mm², O.D:7.4mm,Brown:L, Blue:N, Yellow/Green:PE
 Global model: SJOW,3*1.04mm², O.D:8.5mm,Brown:L, Blue:N, Yellow/Green:PE



DC Output Cable(Lead Length outside enclosure 250±10mm):

UL model: SJTW,2*0.824mm²,O.D: 7.6mm,Red:LED+, Black:LED-
 Euro model: H05RN-F,2*1.0mm², O.D:7.0mm, Brown:LED+, Blue:LED-
 Global model: SJOW,2*1.0mm², O.D:7.7mm, Brown:LED+, Blue:LED-

DIM /DALI/AUX Cable(Lead Length outside enclosure 220±10mm):

UL/Euro/Global model: UL 21996, 5*0.34mm², O.D: 6.0mm, Purple : DIM+/DA, Gray: DIM-/DA, Pink:AUX+, Black/White:AUX-,Blue/White:STB(Optional)

Name Description	Standard code	mm(In.)
PG Size	A	M12*1.5
Fixed Screw Diameter	4-B	Φ7.0(0.28)
Case Diameter	D	Φ151.0(5.95)
Height	H	71.5(2.82)
ADJ Hole	I	ADJ./IO
Ring Hole	Z	M12*1.75(G1/2)
Ring Fixed Hole	R	M4*0.7
Dim cable hole	T	Optional
Fixed Size	W	132.0(5.2)
Fixed Size	W1	132.0(5.2)
Case temperature	TC	90°C
TC point position	X	50(1.97)
TC point position	Y	10(0.4)

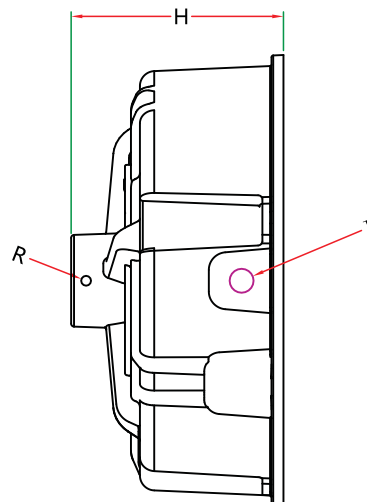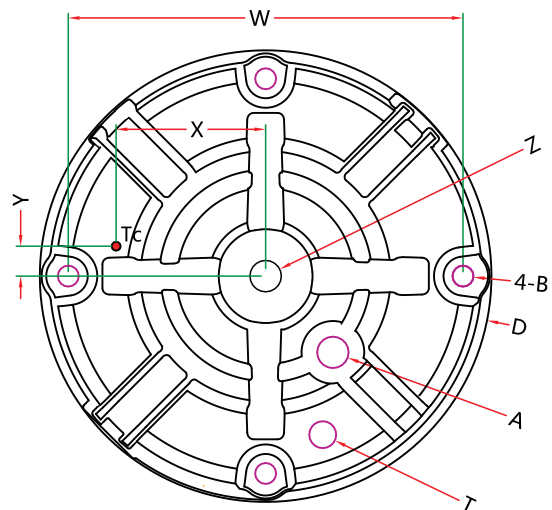

SS-200CA Series LED Driver



Installation Tips

1. Highly recommended to seal the adjustable hole with silicon glue(#704 preferred) after adjusting the driver's output current. Torsion with proper strength to avoid permanent damage to the potentiometer inside.
2. Dimming leads should be capped if not in use to avoid dimming circuit damage caused by external signals.

Package

- Outside carton dimension: L×W×H =500mm×390mm×170mm;
- 10PCS/Carton;
- Net weight/PC: 1.5kg;Gross weight/Carton: 16kg;
- Please refer to the product name, model number, manufacturer identification, quality inspection certificate, manufacturing date Etc. on the package. and LED power supply instruction manual in the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be shielded from direct sunshine, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873 - 83.
Products should be rechecked if stock for over 1 year before installation.

RoHS

Products comply with European directive 2011/65/EC.

REVISION HISTORY

Version	Description of Change	Changed Date	Remark
V00	Original release	2019/09/17	